



Curves Performance Air Cleaner

1. Mount black fuel injection plug cover plate to back of the backing plate. **Shown in picture A** Using stock breather bolts add our spacers. Your stock rubber tubing from breather bolts will be inserted on the holes on our backing plate. **Shown in picture B**
2. Mount the backing plate to throttle body using 3 button heads, bolt up the air cleaner studs, slide spacers on. **Shown in picture C**
3. Install air filter using the nuts provided. Install the center bolt to plug center hole on filter. **Shown in picture D**
4. Using hex head bolts and washers mount the outer cover. **Shown in picture E**




A.



B.



C.

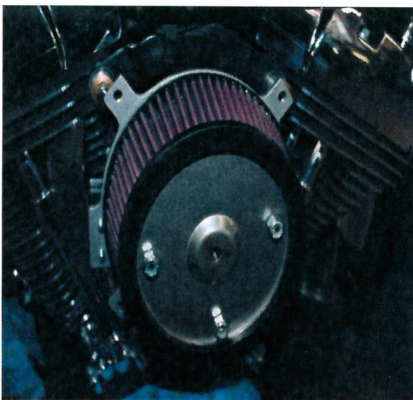

D.



E.

NOTE: USE BLUE LOCKTITE ON ALL HARDWARE